

Bulkhead - NXC 101

Industrial
Application

Page 31



Product description

Bulkhead luminaire suitable for use with GLS 60W (maximum) and PL-S 9W compact fluorescent lamps with option of clear or frosted glass.

Applications like lighting of the lift wells, emergency staircase and passages require a solution that provides optimal light and requires minimum maintenance. Bulkhead luminaire with their robust construction and basic lamps combinations offers the best solution for these harsh conditions.

Features

- Single piece die-cast aluminium housing and glass retaining frame offer excellent corrosion resistance.
- Heat resistant toughened glass cover / acrylic cover for PL-S version together with gasket offer excellent protection against dust and moisture.
- Wire Gaurd made form powder coated MS protects luminaire from damage.

Applications

- Stairways
- Corridors
- Lift wells

Mounting Type

Surface / Wall



NXC 101


Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
NXC101 1xA60-60W-CL B22 GR	1 x GLS 60W	230	0.26	1.00
FXC101 1xPL-S / 2PI 1W AC GR	1 x PL-S 9W	230	0.17	0.35

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
NXC101 1xA60-60W-CL B22 GR	919215100052	8	325 x 305 x 440	1.20 x 8	10.80	0.044
NXC101 1xA60-60W-CL B22 BK	919215100051	8	325 x 305 x 440	1.20 x 8	10.80	0.044
NXC101 1xA60-60W-CL B22 RD	919215100053	8	325 x 305 x 440	1.20 x 8	10.80	0.044
FXC101 1xPL-S / 2PI 1W AC GR	919215100054	8	325 x 305 x 440	1.00 x 8	9.40	0.044
FXC101 1xPL-S / 2PI 1W AC RD	919215100056	8	325 x 305 x 440	1.10 x 8	9.40	0.044
FXC101 1xPL-S / 2PI 1W ACO GR	919215100055	8	325 x 305 x 440	1.10 x 8	9.40	0.044
FXC101 1xPL-S / 2PI 1W ACO RD	919215100057	8	325 x 305 x 440	1.10 x 8	9.40	0.044

NXC 101 / FXC 101

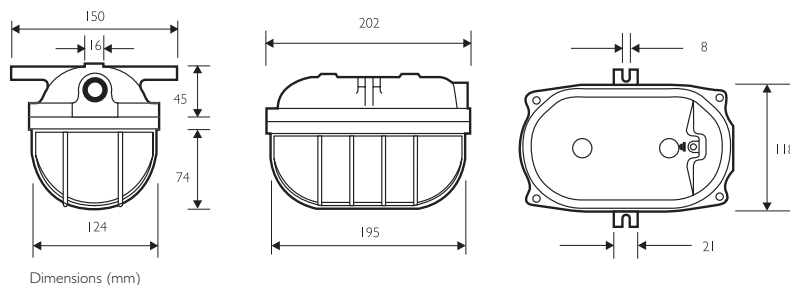

Technical Drawing



2