

# FCS 100

**Retail**  
Application

Page 21

**Office**  
Application

Page 07



# Product description

Surface mounted Downlight luminaire suitable for use with 1 X 13W / 18W PL-C compact fluorescent lamp.

## Features

- Cylindrical aluminium housing with serrations and matte black powder coated.
- Electrochemical brightened reflector with combination of patterns having diamond, serration and gloss for distinct looks.
- Vertical mounted lamps 1 X PL-C 13W / 18W.
- Electronic and copper Ballast versions available.

## Applications

- Corridors / walkways
- Offices
- Shops, hostels and clubs
- Restaurants
- Public areas

## Mounting Type

Downlights and Accents

## Installation

Designed for direct mounting on ceilings.

## Compliances

- IP 20
- Class I


## Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FCS100	1 x PL-C / 2P13W 1240V	240	1.17	0.49
FCS100	1 x PL-C / 2P18W 1240V	240	0.22	0.50

## Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FCS 100 1xPL-C / 2P13W 1240V	919215000181	6	525 x 375 x 225	0.80	6.00	0.04
FCS 100 1xPL-C / 2P18W 1240V	919215000180	6	525 x 375 x 225	0.80	6.00	0.04

Version with electronic Ballast available on request.

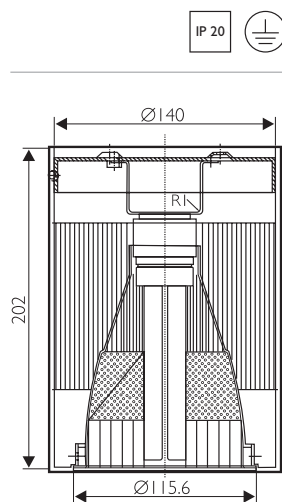

Technical Drawing



