

MBS 205

Retail
Application

Page 21



Product description

Recessed Downlights suitable for use with high pressure Metal Halide MHN-TD / CDM-TD 70W and 150W lamp.

Features

- Pressure die-cast aluminium housing.
- White Polycarbonate ceiling ring.
- Satin silver aluminium reflector designed to provide high light output.
- Aluminium control gear box with heat sink blade to eliminate over heating of ballast.
- 5mm thick tempered glass cover.

Applications

- Receptions and public service areas
- Corridors and staircases
- Recreational areas, sport halls, restaurants, cafeterias
- Department stores, shops and boutiques

Mounting Type

Downlights and Accents

Installation

Designed for recessed mounting on false ceilings.

Compliances


- IP 20
- Class I

Technical data

| Type | For lamp | Nominal voltage (V) | Main current (A) | Nominal power factor |
|------------------------------|---------------|---------------------|------------------|----------------------|
| MBS205 1XCDCM-TD70W IC 240V | 1XCDCM-TD70W | 240 | 0.45 | >=.85 |
| MBS205 1XCDCM-TD150W IC 240V | 1XCDCM-TD150W | 240 | 0.85 | >=.85 |

Ordering data

| Type | Ordering data | Quantity per box | Dimensions (mm) | Net weight (kg) | Gross weight (kg) | Volume (m3) |
|------------------------------|---------------|------------------|-----------------|-----------------|-------------------|-------------|
| MBS205 1XCDCM-TD70W IC 240V | 919015290163 | 1 | 400x273x220 | 3.5 | 5.3 | 0.024 |
| MBS205 1XCDCM-TD150W IC 240V | 919015290213 | 1 | 400x273x220 | 4.4 | 6.2 | 0.024 |

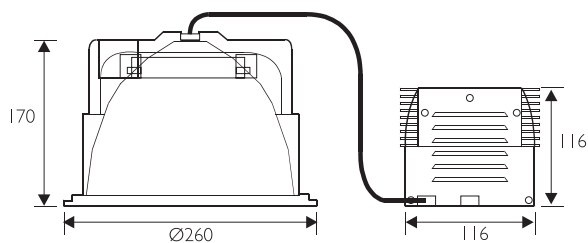

Technical Drawing

