

# Nova - QBS 050

**Retail  
Application**

Page 21



# Product description

Recess mounted Downlights suitable for use with 1X12V 50W (maximum) low voltage Halogen Dichroic lamp in GX 5.3 base. To be used with separate electronic transformer.

## Features

- Body made of die-cast Al for white and black colored luminaire.
- Body made of die-cast Zinc alloy for gold and silver colored luminaire.
- Available in fixed and adjustable version.
- Orientation
  - QBS 050 - Fixed
  - QBS 051 - Vertical 35°
  - QBS 052 - Vertical 35°, Horizontal 355°
  - QBS 058 - Vertical 15°
- Custom designed twist and pull face plate for easy lamp access.

## Applications

- Restaurants and bars • Conference rooms
- Public areas and lobbys • Fashion shops • Jewelry shops

## Mounting Type

Downlights and Accents

## Installation

Designed for recess mounting on false ceilings. The luminaires can be mounted with the help of spring clamps.

## Compliances


- IP 20
- Class I




QBS 051

**Technical data**

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
QBS058 MAX50W-GU5.3 12V WH IN	12v/50w	240	0.22	0.85
QBS051 MAX50W-GU5.3 12V SI IN	12v/50w	240	0.22	0.85
QBS050 MAX50W-GX5.3 12V SI IN	12v/50w	240	0.22	0.85
QBS050 MAX50W-GX5.3 12V WH IN	12v/50w	240	0.22	0.85
QBS050 MAX50W-GX5.3 12V GO IN	12v/50w	240	0.22	0.85
QBS050 MAX50W-GX5.3 12V BK IN	12v/50w	240	0.22	0.85
QBS051 MAX50W-GU5.3 12V WH IN	12v/50w	240	0.22	0.85
QBS051 MAX50W-GU5.3 12V GO IN	12v/50w	240	0.22	0.85
QBS051 MAX50W-GU5.3 12V BK IN	12v/50w	240	0.22	0.85
QBS052 MAX50W-GU5.3 12V SI IN	12v/50w	240	0.22	0.85
QBS052 MAX50W-GU5.3 12V WH IN	12v/50w	240	0.22	0.85
QBS052 MAX50W-GU5.3 12V GO IN	12v/50w	240	0.22	0.85


**Ordering data:** Available on request.

QBS050

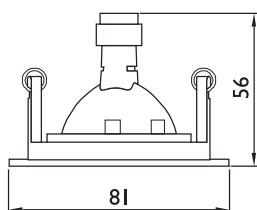


Fixed range  
Cut-out diameter: 68 ~ 71mm

QBS051

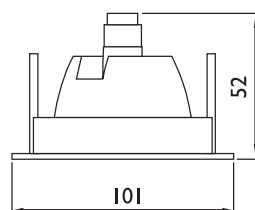


Adjustable range: Vertical 35  
Cut-out diameter: 92 ~ 95mm

Technical Drawing




QBS052

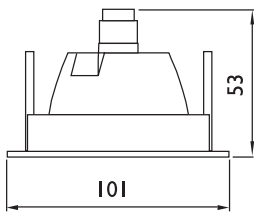

Adjustable range:  
Vertical 35, Horizontal 355  
Cut-out diameter: 92 ~ 95mm

QBS058

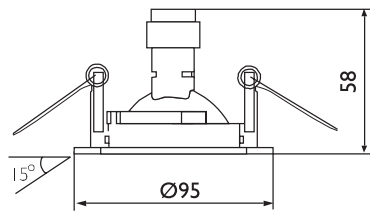

Adjustable range : Vertical 15  
Cut-out diameter : 86 ~ 89 mm

Technical Drawing