

Soho - FBH 150

Retail
Application

Page 21

Office
Application

Page 07



Product description

Attractive Downlight with horizontally placed lamp, 100mm over all depth, suitable for PL-C (3W / 18W) lamp.

Soho offers a complete range of Downlight solutions for PL-13W and 18 Watt light sources. The range offers the option of Turbo, Matte finish, anodised aluminium optics.

Features

- Hingeable gear assembly for easy maintenance.
- Housing made of CRCA 1.2mm thick sheet.
- Bright patterned reflector with a combination of serration at the bottom, intermediate diamond and gloss at the top for higher light output.
- Matte finish and turbo version available.
- Wide CRCA ring cover false ceiling cut out imperfections.
- Also available in Turbo louvre attachment for low glare.

Applications

- Corridors and walkways
- Offices
- Shops, hotels and clubs
- Public Areas

Mounting Type

Downlights and Accents

Installation

By rotating the springs from inside and moving the clamp down.

Compliances


- IP 20
- Class I



FBH 150

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FBH I50 M 1XPL-C/2P13W I 240V	1XPL-C/2P13W	240	0.17	0.45
FBH I50 M 2XPL-C/2P13W I 240V	2XPL-C/2P13W	240	0.34	0.45
FBH I50 M 1XPL-C/2P18W I 240V	1XPL-C/2P18W	240	0.22	0.5
FBH I50 M 2XPL-C/2P18W I 240V	2XPL-C/2P18W	240	0.44	0.5
FBH I50 M 1XPL-C/4P18W HFM 240V	1XPL-C/4P18W	240	0.13	0.6
FBH I50 M 2XPL-C/4P18W EB 240V	2XPL-C/4P18W	240	0.26	0.6
FBI50 1XPL-C/2P13W I 240V	1XPL-C/2P13W	240	0.17	0.45
FBI50 2XPL-C/2P13W I 240V	2XPL-C/2P13W	240	0.34	0.45
FBI50 1XPL-C/2P18W I 240V	1XPL-C/2P18W	240	0.22	0.5
FBI50 2XPL-C/2P18W I 240V	2XPL-C/2P18W	240	0.44	0.5

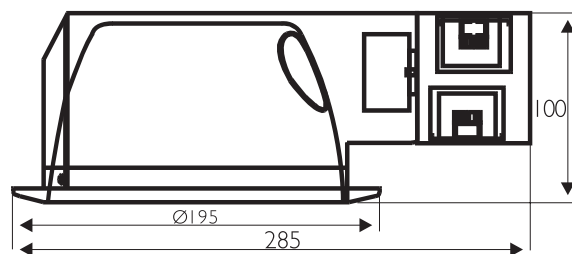

Technical Drawing

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FBH I50 M 1XPL-C/2PI3W I 240V	919215000142	8	500X350X550	1.5	13.5	0.0875
FBH I50 M 2XPL-C/2PI3W I 240V	919215000143	8	500X350X550	1.75	16.5	0.0875
FBH I50 M 1XPL-C/2PI8W I 240V	919215000144	8	500X350X550	1.5	13.5	0.0875
FBH I50 M 2XPL-C/2PI8W I 240V	919215000145	8	500X350X550	1.75	16.5	0.0875
FBH I50 M 1XPL-C/4PI8W HFM 240V	441536070421	8	500X350X550	1.3	12	0.0875
FBH I50 M 2XPL-C/4PI8W EB 240V	441536070321	8	500X350X550	1.55	15	0.0875
FBT I50 1XPL-C/2PI3W I 240V	441536070361	8	500X350X550	1.5	14	0.0875
FBT I50 2XPL-C/2PI3W I 240V	441536070371	8	500X350X550	1.8	17	0.0875
FBT I50 1XPL-C/2PI8W I 240V	441536070381	8	500X350X550	1.5	14	0.0875
FBT I50 2XPL-C/2PI8W I 240V	441536069961	8	500X350X550	1.8	17	0.0875

(FBH: Open Version; FBT: Turbo Version.)