

# FBS 430

**Office**  
Application

Page 07



# Product description

Recessed luminaire suitable for modular ceiling system and lamp options of 2xPL-L36W, 2xPL-L40W, 2xPL-L55W compact fluorescent lamp.

## Features

- Housing-cum-reflector made up of CRCA sheet steel, powder coated white, accommodating all electrical accessories pre-wired up to a terminal block.
- Detachable curved white powder coated perforated CRCA sheet with polyester film inside.
- Option of detachable curved white powder coated perforated CRCA sheet with wide paralite P5 louvers to achieve direct lighting with low glare / high efficiency D6 option or aesthetic MDGN option.
- Available with high frequency electronic and conventional ballast (are applicable).
- Option of using regulating electronic ballast with suitable lighting controls for greater flexible and energy conservation.

## Applications

- Offices
- Hospitals and clinics
- Schools and lecture rooms
- Retail

## Mounting Type

Recessed luminaires

## Installation


- Resting on T-bar of false ceiling
- Suspension via hooks or chains
- Hanging via swing-out brackets

## Compliances


- IP 20
- Class I

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FBS430 M 2XPL-L36W IC P5	2xPL-L36W	240	0.46	0.9
FBS430 M 2XPL-L36W IC	2xPL-L36W	240	0.46	0.9
FBS 430 2XPLL 36W P5 HF EBT 236	2xPL-L36W	240	0.32	0.98
FBS 430 2XPLL 36W HF EBT 236	2xPL-L36W	240	0.32	0.98
FBS 430 P 2XPLL 40W P5 EBP P3019	2xPL-L40W	240	0.36	0.98



FBS 430 / FBS 430 P5

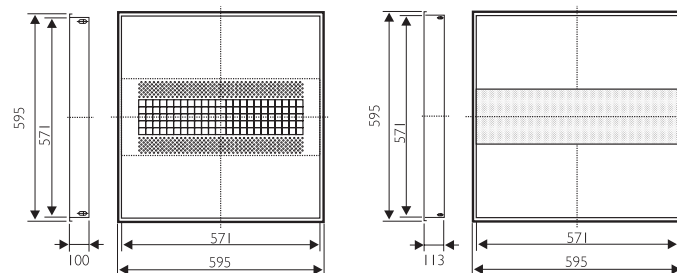

Technical Drawing

**Ordering data**

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FBS430 M 2XPL-L36W IC P5	919015084126	2	650x650x230	4.5	12	0.089
FBS430 M 2XPL-L36W IC	919015084127	2	650x650x230	4.5	12	0.089
FBS 430 2XPLL 36W P5 HF EBT 236	919015810179	2	650x650x230	4	11	0.089
FBS 430 2XPLL 36W HF EBT 236	919015810218	2	650x650x230	4	11	0.089
FBS 430 P 2XPLL 40W P5 EBP P3019	919615810213	2	650x650x230	4	11	0.089

Other variants available on request.

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

