

FBS 440

Office
Application

Page 07



Product description

Recessed mounted luminaire with M11 optics specially designed for twin T5 and T8 Lamps. This family is offered only in electronic version offering best of energy efficiency and performance.

Features

- Sturdy housing made from CRAC.
- TL5 lamps options for energy saving and high light output.
- Easy to install, easy to maintain.
- Advanced lamellae for glare control.
- Available in 2x36 / 2x38 and 2x54 versions.

Applications

- Small offices
- Receptions and public service rooms
- Recreational areas
- General open plan office

Mounting Type

Recessed mounted

Installation

Provision for suspension through conduit or chain suspension.


Compliance

IP 20

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FBS 440 2XPLL 36W OB EBW	2XPLL 36W	240	0.3	0.98
FBS 440 2XPLL 40W OB EBP	2XPLL 40W	240	0.38	0.98
FBS 440 2XPLL 55W OB HFP	2XPLL 55W	240	0.46	0.98
TBS 440 4XTL-5 14W OB EBP	4xTL-5 54W	240	0.29	0.98

IP 20

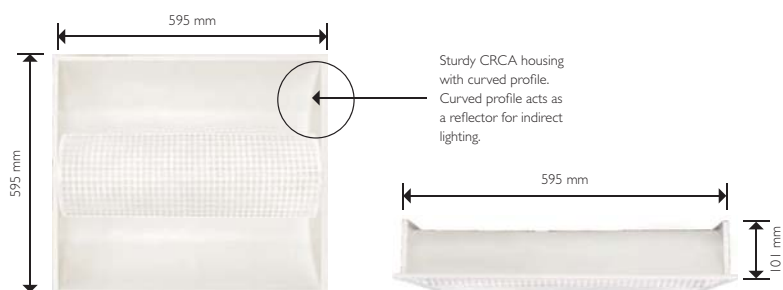

Dimensional details

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FBS 440 2XPLL 36W SP EBW	919015810247	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 36W RP EBW	919015810248	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 36W RL EBW	919015810249	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 36W OL EBW	919015810250	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 36W OP EBW	919015810251	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 36W OS EBW	919015810252	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 36W OB EBW	919015810253	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W SP EBP	919015810254	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W RP EBP	919015810255	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W RL EBP	919015810256	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W OL EBP	919015810257	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W OP EBP	919015810258	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W OS EBP	919015810259	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W OS EBP	919015810259	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 40W OB EBP	919015810260	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W SP HFP	919015810261	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W RP HFP	919015810262	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W RL HFP	919015810263	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W OL HFP	919015810264	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W OP HFP	919015810265	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W OS HFP	919015810266	2	650x650x230	4	9.5	0.097
FBS 440 2XPLL 55W OB HFP	919015810267	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W SP EBP	919015810268	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W RP EBP	919015810269	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W RL EBP	919015810270	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W OL EBP	919015810271	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W OP EBP	919015810272	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W OS EBP	919015810273	2	650x650x230	4	9.5	0.097
TBS 440 4XTL5 14W OB EBP	919015810274	2	650x650x230	4	9.5	0.097

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.