

# Wing-C

**Office**  
Application

Page 07



# Product description

Exclusive direct-indirect decorative efficient luminaire suitable for modular ceiling system and suitable for lamp 2 X PL-L 36 W compact fluorescent lamp.



FBS 470/236 D6 (PW)

FBS 470/236 D6 (FA)

### Features

- Housing-cum-reflector made up of CRCA sheet steel powder coated white, accommodating all electrical accessories pre-wired up to a terminal block.
- Housing Dimensions of 595mm X 595mm for mounting on metric ceilings type Armstrong / US gypsum.
- 2 types of louvers, M6 and D6 for multiple options in direct downward lighting and high luminaire efficiency.
- 3 D OLC lamellae provides excellent glare control and light distribution.
- Specially designed side caps for louvers assembly for distinct looks.
- Decorative 'Wings' with fins comprising of translucent engineering plastics for diffused light and floating effect.
- Parabolic back reflector of matte finish high purity aluminium for indirect light and creation of a bath of light.
- Available with high frequency electronic ballast for energy conservation and instant start. Regulating electronic ballast can also be used with lighting controls for dimming and flexibility.

### Applications

- Offices
- Call centres
- Hospitals and clinics
- Software offices
- Restaurants
- Shops

### Mounting Type

Recessed luminaires

### Installation

- Resting on T-bar of false ceiling
- Suspension via hooks or chains

### Compliances


- IP 20
- Class I



## Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FBS 470 2XPLL 36W M6 FA HF EBT 236	2xPLL-36W	240	0.32	0.98
FBS 470 2XPLL 36W M6 FA HF EBT 236	2xPLL-36W	240	0.32	0.98
FBS 470 2XPLL 36W D6 PW HF EBT 236	2xPLL-36W	240	0.32	0.98
FBS 470 2XPLL 36W D6 AG HF EBT 236	2xPLL-36W	240	0.32	0.98
FBS 470 2XPLL 36W M6 PW HF EBT 236	2xPLL-36W	240	0.32	0.98
FBS 470 2XPLL 36W M6 AG HF EBT 236	2xPLL-36W	240	0.32	0.98

IP 20

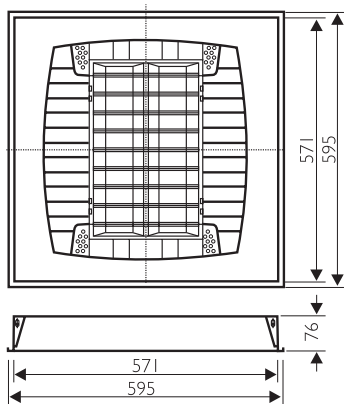

Technical Drawing



**Ordering data**

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FBS 470 2XPLL 36W M6 FA HF EBT 236	919015810180	2	720x665x165	4.3	10.5	0.079
FBS 470 2XPLL 36W M6 FA HF EBT 236	919015810180	2	720x665x165	4.3	10.5	0.079
FBS 470 2XPLL 36W D6 PW HF EBT 236	919015810189	2	720x665x165	4.3	10.5	0.079
FBS 470 2XPLL 36W D6 AG HF EBT 236	919015810190	2	720x665x165	4.3	10.5	0.079
FBS 470 2XPLL 36W M6 PW HF EBT 236	919015810191	2	720x665x165	4.3	10.5	0.079
FBS 470 2XPLL 36W M6 AG HF EBT 236	919015810192	2	720x665x165	4.3	10.5	0.079

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.