

FCS 3 I

Office
Application

Page 07



Product description

Surface mounted luminaire suitable for use with PL-S 9W / 11W compact fluorescent lamps.

Features

- Housing made of MS CRCA sheet steel, painted white, accommodating all electrical accessories pre-wired up to a terminal block.
- A reflector assembly, made of high purity aluminium sheet, electrochemically brightened and anodised, fitted with aluminium lamellae.
- Stainless spring clips for fixing the reflector to the housing.

Applications

- Representatives offices
- Conference rooms
- Small offices
- General open plan offices
- Reception and public service areas
- Corridors and staircases
- Recreational areas (sport halls, restaurants, cafeterias)
- Department stores, fashion shops
- Small independent food / non-food shops

Mounting Type

Surface mounted luminaires

Installation

Designed for surface mounting on ceilings.

Compliances

- IP 20
- Class I


Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FCS031 2xPL-5 / 2P9W 1240V	2 X PL-S 9 W	240	0.15	0.45
FCS031 2xPL-5 / 2P11W 1140V	2 X PL-S 11 W	240	0.30	0.45

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FCS031 2xPL-5 / 2P9W 1240V	919015564001	2	390 x 325 x 175	2.60 x 2	6.50	0.022
FCS031 2xPL-5 / 2P11W 1140V	919015564001	2	390 x 325 x 175	2.60 x 2	6.50	0.022

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

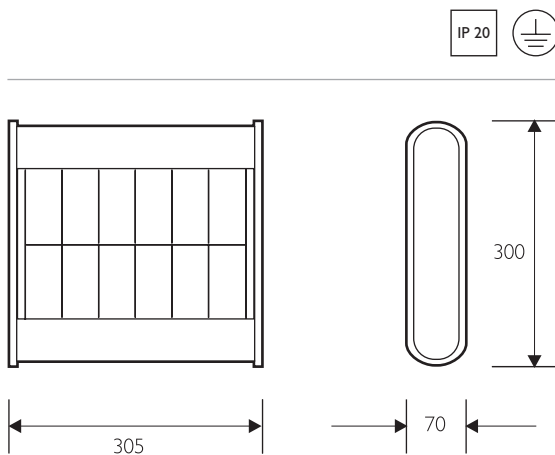

Technical Drawing



