

Lotus - FCS 518

Office
Application

Page 07



Product description

Surface mounted luminaire suitable for use with 2 X PLS 9 / 11 / 18W compact fluorescent lamps.

Features

- Aesthetically designed 3D profile, high grade engineering plastic housing.
- Ventilation slits to provide better thermal performance, and add to the interior ambiance.
- Imported pre-anodised optically designed mirrors for efficient and uniform lighting effect.
- Mirror assembly and lamellae are integrated with the housing, and is click fixed with the Gear Tray with 4 cam springs.

Applications

- Reception and public service areas
- High-end offices
- Conference rooms
- Recreational areas
- Departmental stores
- Shops, boutiques
- Staircase landings

Mounting Type

Surface mounted luminaires

Installation

Designed for surface mounting on ceilings.

Compliances

- IP 20
- Class I



Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
FCS518 2XPL-S/2P11W 240V	2XPL-S/2P11W	240	0.3	0.45
FCS518 2XPL-S/2P9W 240V	2XPL-S/2P9W	240	0.15	0.45
FCS518 2XPL-L18W 240V	2XPL-L18W	240	0.4	0.48

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
FCS518 2XPL-S/2P11W 240V	919215000146	4	700x590x165	1.5	8	0.068
FCS518 2XPL-S/2P9W 240V	919215000147	4	700x590x165	1.25	7	0.068
FCS518 2XPL-L18W 240V	441536071041	4	700x590x165	1.7	9	0.068

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

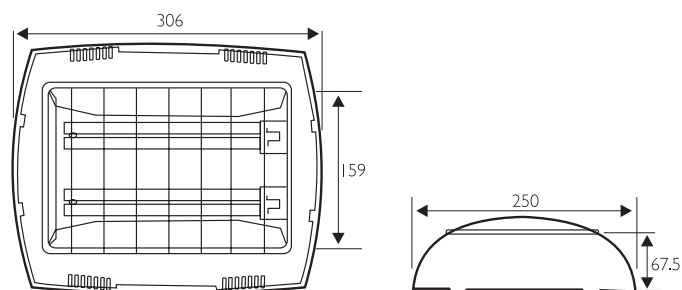

Technical Drawing

