


CFL Luminaires



Utilite

Dimensions (mm)

FMC 200 / III
Utilite

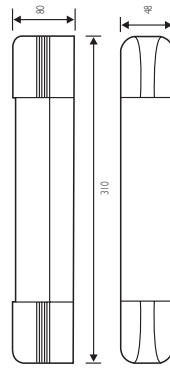

CFL Luminaires

FMC 200 / III Utilite



General Description
• Compact Wall / Ceiling-Mounted Luminaire suitable for 1 x PLS 9W/11W Compact Fluorescent Lamp

Features

- Low-loss, O.C. Copper Ballast, specially impregnated for longer life
- End caps engineered to match the profile of the lamp and luminaire housing, adding aesthetic appeal, made of ABS (available in colours)
- UV stabilised prismatic SAN diffuser for protection & elimination of lamp glare
- Multiple channel colour options
- White reflector base for higher light delivery
- Pre-constructed & pre-wired tested CRCA steel channel complete with all electrical accessories like copper ballast, lampholder all pre-wired upto a terminal block

Applications

- Shops
- Office interiors
- Corridors
- Utility areas
- Dressing tables

Installation

- Designed for surface mounting, this luminaire can be fixed on the wall by means of holes provided on the channel

Compliance

- Tested as per IEC 598 / IS 10372



CFL Luminaires FMC 200 / III Utilite

Technical Data

Type	For Lamp	Nominal Voltage (V)	Mains Current (A)	Nominal Power Factor
FMS 200/III	1 X PLS 9W/11W	240	0.155	0.45

Ordering Data

Type	Ordering No	Quantity per box	Dimensions (mm)	Net Weight (kg)	Gross Weight (kg)	Volume (m ³)
FMS 200/III (White)	1321 11735	10	380 X 190 X 290	0.60 X 10	7.20	0.021

