

TCS 306

Office
Application

Page 07



Product description

Widespread mirror optics luminaire for surface as well as recessed mounting suitable for TLD & TL-5 lamps. Single and twin lamp versions are available.

Features

- Housing made of CRCA sheet steel, powder coated white, accommodating all electrical accessories pre-wired up to a terminal block.
- Innovative corner brackets made of engineering plastic to enhance the aesthetics.
- Specially designed optical system of high purity aluminium, with matte lamellae. The reflector is fixed to the housing by mirror holding clips and can be hinged to the housing during installation / maintenance.
- High efficiency mirror optic reflector of high quality aluminium with diffuse lamellae designed for high optical efficiency and widespread light distribution.

Applications

- Small offices
- Conference rooms
- Reception and public service areas
- Recreational areas (restaurants, cafeterias)
- Shops and boutiques

Mounting Type

Surface mounted luminaires

Installation

Provision for recessed mounting or direct on surface.

Can also be pendent mounted.

Compliances


- IP 20



TCS 306 1xTL-D36W

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TCS306 2XTL-D36W IC	2xTL-D36W	240	0.46	0.9
TCS306 1XTL-D36W IC	1xTL-D36W	240	0.23	0.9
TCS306 2XTLD 36W EBT	2xTL-D36W	240	0.32	0.98
TCS306 1XTLD 36W EBT	1xTL-D36W	240	0.17	0.98

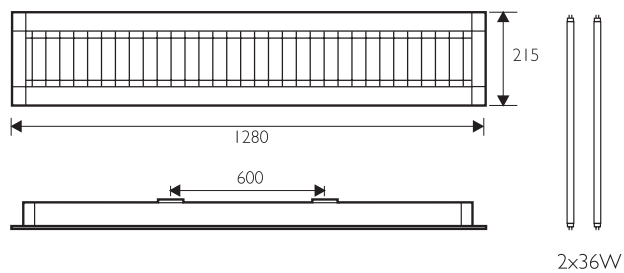

Technical Drawing

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TCS306 2XTL-D36W IC	919015084121	2	1330x275x205	4.3	10	0.074
TCS306 1XTL-D36W IC	919015084124	2	1330x275x205	4	9	0.074
TCS306 2XTLD 36W EBT	919015810202	2	1330x275x205	3.8	10	0.074
TCS306 1XTLD 36W EBT	TBA	2	1330x275x205	3.5	9	0.074

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

