

Adreno neo

Office
Application

Page 07



Product description

Slim, robust, non-corrosive. Safer and lighter decoBatten with instant start, flicker free, energy saving, wider operating range, high power factor.

Features

- 45% energy saving vs. 40W TL lamp.
- Ultra slim, BatWing profile for maximum light output.
- Instant start, flicker-free, electronic operation.

Applications

- Home
- Hotels
- Colleges
- Schools
- Guest houses
- Officer interiors
- General ambient lighting, furniture and under-cabinet, mirror sides, corridors.

Installation

Design for surface mounting, this luminaire can be fixed on wall or ceiling by means of installer provided along with the luminaire.

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TWG204 IXTL5-14W/865	T5 14W	230V	0.13	0.60
TWG204 IXTL5-14W/830	T5 14W	230V	0.13	0.60
TWG204 IXTL5-28W/865	T5 28W	230V	0.17	0.98
TWG204 IXTL5-28W/840	T5 28W	230V	0.17	0.98
TWG204 IXTL5-28W/830	T5 28W	230V	0.17	0.98

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TWG204 IXTL5-14W/865	I35025775	30	685 × 280 × 200	0.274 × 30	11.344	0.0383
TWG204 IXTL5-14W/830	I35027175	30	685 × 280 × 200	0.274 × 30	11.344	0.0383
TWG204 IXTL5-28W/865	I35025755	30	1285 × 280 × 200	0.526 × 30	21.134	0.0732
TWG204 IXTL5-28W/840	I35025785	30	1285 × 280 × 200	0.526 × 30	21.134	0.0732
TWG204 IXTL5-28W/830	I35027155	30	1285 × 280 × 200	0.526 × 30	21.134	0.0732

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.



Type	L (mm)	W (mm)	H (mm)
TWG204 IXTL5-14W	665	52	30
TWG204 IXTL5-28W	1265	52	30

Technical Drawing

Miroлта Slim - 36W & 18W

Office
Application

Page 07



Product description

Sleek and electronic DecoBatten with colored End Cap adds to the aesthetics suitable for use with 1 X TL D 36W Fluorescent lamp.

Features

- Slim and sleek.
- 25% energy saving as compared to 40W conventional Batten.
- HPF (High Power Factor) Batten, PF>.9.
- Pre-phosphated and powder coated CRCA steel channel complete with all the electrical accessories like electronic ballast, lamp holders and pre-wired up to a terminal block.
- Aesthetically designed dual color end caps.
- Operates from 140V to 270V.
- Single Piece construction.

Applications

- Office interiors • Horeca
- Budget hotel rooms • Shops

Installation

Designed for surface mounting, this luminaire can be fixed on wall or ceiling by means of installer provided along with the luminaire.

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TMS520/I 36 HF	IXTLD 36W	240V	0.16 A	0.9
TMS520/I 18 HF	IXTLD 18W	240V	0.08 A	0.9

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TMS520/I 36 HF	919215810005	10	1330 × 230 × 140	0.61	7.6	0.0428
TMS520/I 18 HF	919215810013	10	730 × 230 × 140	0.35	4.3	0.0235

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

Miroлта Slim T5 - 28W

Office
Application

Page 07



Product description

Bright, slim and efficient with colored end caps and robust body aesthetically designed to suite office space.

Features

- Bright, slim and efficient.
- Designed to Inspire : Aesthetically designed dual color end caps.
Design registered by Philips.
- 45% Energy saving.
- High Power Factor (HPF) >0.98.
- Long lasting metal body.
- Warm start operation: helps in longevity of lamp life.
- Automatic deactivation ensures complete safety.
- One of most energy efficient fluorescent system:
delivers 78 lumen / Watt.

Applications

- Office interiors
- Budget hotel rooms
- Shops

Installation

Designed for surface mounting, this luminaire can be fixed on wall or ceiling by means of installer provided along with the luminaire.

Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TMS540 IXTL5 28W HF/865	IXT5 28W	240V	0.17	>0.98

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TMS540 IXTL5 28W HF/865	919215810017	20	1310 X 220 X 140	0.52	13	0.0403

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

Tarang Electronic

Office
Application

Page 07



Product description

Energy saving electronic striplite suitable for use with 1 x TL'D / TL fluorescent lamp.

Features

- Saves 25% energy as compared to conventional electromagnetic ballast with 40W lamp.
- Operates from 170V to 270V.
- Instant start without any lamp flickering.
- Silent operation.
- Negligible heat generation and avoids wall blackening.
- 100% Prephospated and powder coated CRCA steel channel with all accessories like energy saving electronic ballast, lamp holders pre-wired up to a terminal block.
- Specially designed click fix safe contact lampholders and impact resistant Polycarbonate brackets makes the luminaire suitable for easy use with any make lamp.
- Easy to install mounting holes.
- Available in 2ft and 4ft versions.
- Protective product shrink-wrapping.

Applications

- Homes • Shops • Schools / universities / colleges
- Small cafeterias / restaurants / hotels • Office interiors
- Common area lighting • Parking areas / corridors / basements

Installation

Designed for surface mounting, this luminaire can be fixed on wall or ceiling by means of holes provided on the channel.


Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TMC 090/136	IXTL'D 36W or IXTL 40W	230V	0.16 A	0.90
TMC 090/118	IXTL'D 18W or IXTL 20W	240V	0.08 A	0.90

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TMS520/136 HF	919215810005	10	1330 X 230 X 140	0.61	7.6	0.0428
TMS520/118 HF	919215810013	10	730 X 230 X 140	0.35	4.3	0.0235

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

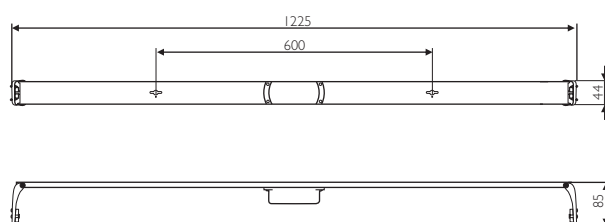

Technical Drawing

Vector neo

Office
Application

Page 07



Product description

Slim, robust, non-corrosive. Safer and lighter DecoBatten with instant start, flicker free, energy saving, wider operating range, high power factor.

Features

- 45% energy saving.
- T5 electronic Batten.
- Slim, robust, non-corrosive.
- Full light output.
- Instant flicker free start.

Applications

- Display racks • Suspended lighting • Cove lighting
- Shop windows • Light lines • Office • Shop
- Partition light

Installation

Design for surface mounting, this luminaire can be fixed on wall or ceiling by means of installer provided along with the luminaire. Please do not install this Batten by paralleled together.


Technical data

Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TCH204 IXTL5-14W/865	T5 14W	230V	0.13	0.60
TCH204 IXTL5-14W/830	T5 14W	230V	0.13	0.60
TCH204 IXTL5-28W/865	T5 28W	230V	0.17	0.98
TCH204 IXTL5 28W/840	T5 28W	230V	0.17	0.98
TCH204 IXTL5 28W/830	T5 28W	230V	0.17	0.98

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TCH204 IXTL5-14W/865	I35025705	30	685 × 280 × 200	0.227 × 30	9.934	0.0383
TCH204 IXTL5-14W/830	I35027235	30	685 × 280 × 200	0.227 × 30	9.934	0.0383
TCH204 IXTL5-28W/865	I35025685	30	1285 × 280 × 200	0.427 × 30	18.164	0.0732
TCH204 IXTL5 28W/840	I35025715	30	1285 × 280 × 200	0.427 × 30	18.164	0.0732
TCH204 IXTL5 28W/830	I35027215	30	1285 × 280 × 200	0.427 × 30	18.164	0.0732

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.

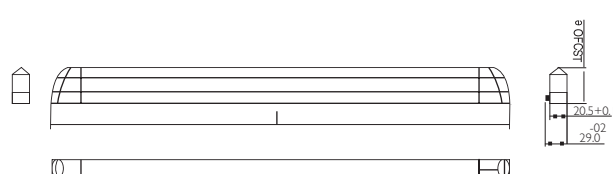

Type	L (mm)	W (mm)	H (mm)
TCH204 IXTL5-14W	665	52	30
TCH204 IXTL5-28W	1265	52	30

Technical Drawing