

CLARIA Plus



TBS65 I



FBS65 I

Product description

Philips Claria is a family of specialised luminaires suitable for offering effective lighting solutions for clean room applications in industry. The luminaire has an advanced design suitable for PL-L and Energy Efficient TL5 lamp with option of rear opening and front opening. It has a robust CRCA housing, CRCA frame and option of glass and acrylic cover. Protected against ingress of water and dust.

Features

- Corrosion resistant powder coated CRCA housing with hingable CRCA frame.
- Sealed dual compartment construction for better heat management and ingress protection retention.
- Performer Ballast for constant light output.
- Aluminum anodised reflector and CRCA powder coated reflector.
- Detachable Gear Tray which accommodates the holders and the gear for ease of maintenance.

Applications

- Clean Rooms in pharma and electronic industries
- Kitchens in hotels and resorts
- Food processing industries


Mounting Type

- Recessed PL-L
- Recessed TL5 lamps option



CLARIA Plus

Dimensions (mm)

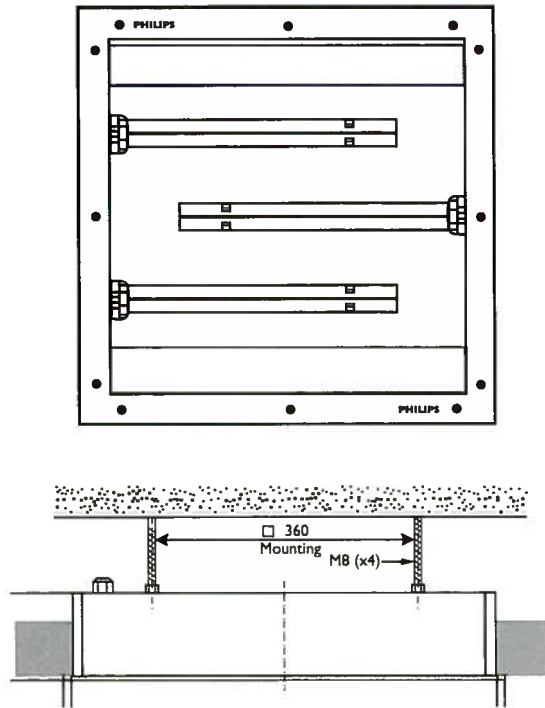

Technical Drawing

Technical data

I2NC	Luminaire	Lamp	System wattage	System current	Power factor
919015810515	FBS65 3xPLL-36W EB CR FOP GT	PLL 36w	91	0.38	0.99
919015810517	TBS65 4xTL5-14W EB CR FOP GT	TL5 14w	58	0.24	0.99
919015810519	TBS65 4xTL5-24W EB CR FOP GT	TL5 24w	92	0.39	0.99
TBA	FBS65 3xPLL-36W EB CR FOP CA	PLL 36w	91	0.38	0.99
TBA	TBS65 4xTL5-14W EB CR FOP CA	TL5 14w	58	0.24	0.99
TBA	TBS65 4xTL5-24W EB CR FOP CA	TL5 24w	92	0.39	0.99
919015810514	FBS65 3xPLL-36W EB AL FOP GT	PLL 36w	91	0.38	0.99
919015810516	TBS65 4xTL5-14W EB AL FOP GT	TL5 14w	58	0.24	0.99
919015810518	TBS65 4xTL5-24W EB AL FOP GT	TL5 24w	92	0.39	0.99
TBA	FBS65 3xPLL-36W EB AL FOP CA	PLL 36w	91	0.38	0.99
TBA	TBS65 4xTL5-14W EB AL FOP CA	TL5 14w	58	0.24	0.99
TBA	TBS65 4xTL5-24W EB AL FOP CA	TL5 24w	92	0.39	0.99

Ordering data

I2NC	Luminaire	Dimensions	Nett wt	Gross Wt	Volume
919015810515	FBS65 3xPLL-36W EB CR FOP GT	680mm x 680mm x 170mm	10.6	13.00	0.079
919015810517	TBS65 4xTL5-14W EB CR FOP GT	680mm x 680mm x 170mm	10.6	13.00	0.079
919015810519	TBS65 4xTL5-24W EB CR FOP GT	680mm x 680mm x 170mm	10.6	13.00	0.079
TBA	FBS65 3xPLL-36W EB CR FOP CA	680mm x 680mm x 170mm	9.6	12.00	0.079
TBA	TBS65 4xTL5-14W EB CR FOP CA	680mm x 680mm x 170mm	9.6	12.00	0.079
TBA	TBS65 4xTL5-24W EB CR FOP CA	680mm x 680mm x 170mm	9.6	12.00	0.079
919015810514	FBS65 3xPLL-36W EB AL FOP GT	680mm x 680mm x 170mm	9.7	12.10	0.079
919015810516	TBS65 4xTL5-14W EB AL FOP GT	680mm x 680mm x 170mm	9.7	12.10	0.079
919015810518	TBS65 4xTL5-24W EB AL FOP GT	680mm x 680mm x 170mm	9.7	12.10	0.079
TBA	FBS65 3xPLL-36W EB AL FOP CA	680mm x 680mm x 170mm	8.7	11.10	0.079
TBA	TBS65 4xTL5-14W EB AL FOP CA	680mm x 680mm x 170mm	8.7	11.10	0.079
TBA	TBS65 4xTL5-24W EB AL FOP CA	680mm x 680mm x 170mm	8.7	11.10	0.079