

Sereno - TBS 869

Office
Application

Page 07



Product description

Advanced recessed luminaires with D8 Micro-optics specially designed for T5 Lamps. These luminaires offer the best combination of performance and energy efficiency.

Sereno luminaires offer the latest technology for high comfort and optical efficiency in a miniature profile.



TBS 869 / 228 D8 HF

Features

- Suitable for recess mounting in modular ceilings for direct lighting.
- D8 Micro-optics, with excellent glare control (designed for UGR 19).
- 3 dimensional smooth interrupted arch contour offers high efficiency levels.
- The high efficiency optical system offers the best package for excellent uniformity and glare control.
- Housing made of powder coated CRCA.

Applications

- Software offices / Corporate offices
- Receptions and lobbies
- Schools and colleges
- Open plan offices / Executive cabins
- Conference rooms

Mounting Type

Recessed luminaires

Installation

- Suitable for recess mounting in modular false ceiling systems with 600x600 mm module.
- Resting on T-Bar.
- Additional provision suspension with chain / hook.

Compliances

- IP 20
- Class I




Technical data


Type	For lamp	Nominal voltage (V)	Main current (A)	Nominal power factor
TBS 869 4xTL-5 14W EBP D8	4 x TL5 14W	240	0.28	0.96
TBS 869 2xTL-5 28W EBP D8	2 x TL5 28W	240	0.27	0.98
TBS 869 2xTL-5 54W EBP D8	2 x TL5 54W	240	0.27	0.98



TBS 869 2xTL-528W

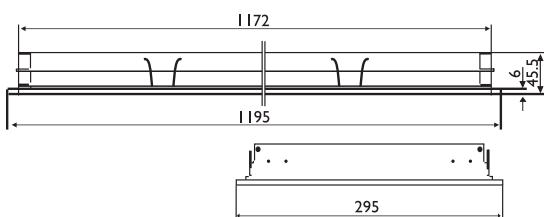

TBS 869 4xTL-514W

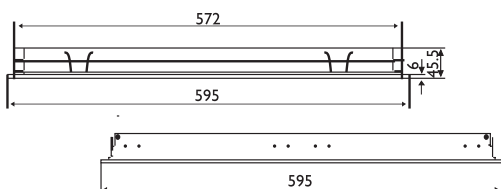

Technical Drawing

Ordering data

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TBS 869 4xTL-5 14W EBP D8	919015067122	2	675 x 665 x 120	3.80	9.20	0.0539
TBS 869 2xTL-5 28W EBP D8	919015067123	2	1280 x 365 x 120	4.00	9.50	0.0561
TBS 869 2xTL-5 54W EBP D8	919015810099	2	1280 x 365 x 120	4.00	9.50	0.0561

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.