

# Artisto

Office  
Application

Page 07



# Product description

Sleek and asthetically superior suspended luminaires with Direct / Indirect lighting options suitable for TL-5 28 watt and T1-5 54 Watt lamps.

Artisto is a comprehensive family of suspended range of T5 luminaires for office lighting applications. Extruded aluminium housing with asthetic PDC end caps and PMMA diffuser offer an excellent ambient light experience. Artisto is avaiable in four different shapes.



TPS 610



TPS 611



TPS 618



TPS 643

### Features

- The housing is made of extruded aluminium with pressure die-cast aluminium end caps (wherever applicable), which gives it a smooth as well as rich look.
- The diffuser is made of thick PMMA of very high quality to get excellent diffused lighting experience. The PMMA is easy to handle as well as simple to maintain.
- 'Artisto' is designed for TL5 - 28W and TL5 - 54W lamp options, with electronic Ballasts only.
- Electronic, high frequency performer Ballast is provided with the luminaires. Power factor would be approx. 0.99.
- Aesthetically designed and modern 2 suspension system with micrometric clutch for height adjustment along with suspension cups are provided with the luminaires. The suspension system is safe, easy to handle, simple to install and trouble free.

### Applications

- Office
- Conference Rooms

### Mounting Type

Suspended

### Installation

Direct mounting on ceiling.

### Compliances


- IP 20
- Class I




## Technical data

Type	For lamp	Nominal voltage (V)	Recommended Ballast	Main current (A)	Nominal power factor
TPS 610 2x28W TL-5 DI HFP	2 × 28W TL-5	240	1 × HFP 14-35 TL5	0.27	0.99
TPS 611 2x28W TL-5 DI HFP	2 × 28W TL-5	240	1 × HFP 14-35 TI5	0.27	0.99
TPS 618 2x28W TL-5 DI EBP	2 × 28W TL-5	240	1 × EBP 228	0.27	0.99
TPS 643 2x28W TL-5 IND EBP	2 × 28W TL-5	240	1 × EBP 228	0.27	0.99
TPS 610 2x54W TL-5 DI HFP	2 × 54W TL-5	240	1 × HFP 254 TI5	0.50	0.99
TPS 611 2x54W TL-5 DI HFP	2 × 54W TL-5	240	1 × HFP 254 TL5	0.50	0.99
TPS 618 2x54W TL-5 DI EBP	2 × 54W TL-5	240	1 × EBP 254	0.46	0.99
TPS 643 2x54W TL-5 IND EBP	2 × 54W TL-5	240	1 × EBP 254	0.46	0.99

TPS 610

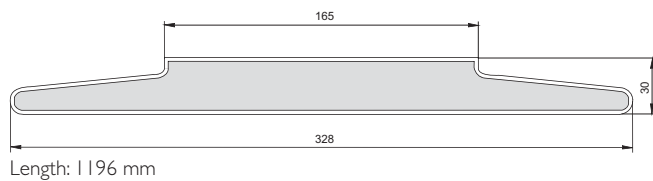

TPS 611

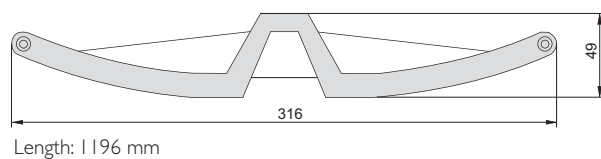

Technical Drawing


**Ordering data**

Type	Ordering data	Quantity per box	Dimensions (mm)	Net weight (kg)	Gross weight (kg)	Volume (m3)
TPS 610 2x28WTL-5 DI HFP	9190 158 10139	1	1280 × 400 × 85	5.0	6.0	0.0430
TPS 611 2x28WTL-5 DI HFP	9190 158 10140	1	1280 × 400 × 120	2.5	3.5	0.0614
TPS 618 2x28WTL-5 DI EBP	9190 158 10141	1	1280 × 470 × 130	2.2	5.5	0.0782
TPS 618 2x28WTL-5 DI EBP	9190 158 10142	1	1380 × 220 × 90	1.6	2.6	0.0273
TPS 610 2x54WTL-5 DI HFP	9190 158 10157	1	1280 × 400 × 85	5.0	6.0	0.0430
TPS 611 2x54WTL-5 DI HFP	9190 158 10158	1	1280 × 400 × 120	2.5	3.5	0.0614
TPS 618 2x54WTL-5 DI EBP	9190 158 10159	1	1280 × 470 × 130	2.2	5.5	0.0782
TPS 643 2x54WTL-5 IND EBP	9190 158 10160	1	1380 × 220 × 90	1.6	2.6	0.0273

Dimmable version with 0-10 v dc Analog dimming and Digital Dali 'DALI' are available on request.




TPS 618



Length: 1196 mm

TPS 643

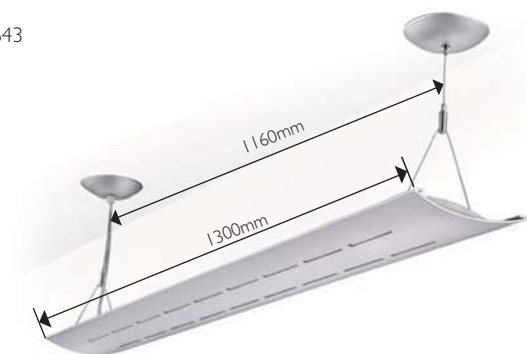

Length: 1300 mm

Technical Drawing